Issue 3

Superclamps

Micro cable hanging system





Ormiston Wire Ltd, 1 Fleming Way, Worton Road, Isleworth, Middlesex, TW7 6EU Tel 020 8569 7287 Fax 020 8569 8601 E-mail info@ormiston-wire.co.uk Web www.ormiston-wire.co.uk

Superclamps

Instantly adjustable micro cable fittings

Superclamps are an instantly adjustable high quality micro cable fitting system. By simply pressing the button on each clamp it can be moved up or down to a new position where it becomes instantly locked. No tools needed.

These fittings take cable between 1.20mm and 2.0mm 7 x 7 construction stainless steel. Strength depends on the fittings used but are capable of supporting not less than 30kgs. They are ideal for shelving, track lighting systems, pictures or product display, in fact, anything that needs attractive instant cable adjustment.

The cable is cut and threaded onto the


Superclamp which is moved to the desired position. Fine adjustment could not be easier.

With the wide variety of ceiling fittings and clamp attachments, every possible situation can be covered. We also stock a wide range of micro cables and wire ropes in stainless steel suitable for all makes of cable systems. Ask for our separate price lists.


Superclamps can be used anywhere adjusted fitting is required. No tools are needed, just finger pressure adjusts. (Minimum order charge £30.00 plus carriage and VAT)

888-0001		888-0002		888-0003	
Barrel Clamp		Plate clamp male		Plate clamp female	
Wire size	1.5mm	Wire size	1.5mm	Wire size	1.5mm
Strength	50kg	Strength	55kg	Strength	55kg
Thread size	M8	Thread size	M8	Thread size	M10 internal
Finish	Chrome	Finish	Black	Finish	Black
Ĩ					
2					

wi:	rebrochure 3/2/04 11:54 a	m Page <u>3</u>	Currenterere	
	888-0005 Insert clamp Wire size 1.5mm Strength 55kg Thread size M8 0.75 pitch	888-0006 Locking board plate Wire size 1.5mm Strength 55kg Finish Chrome	Superclamps888-0010Clamp studWire size1.5mmStrength50kgThread sizeM10Length13cm	
÷	888-0013Chrome end fittingThread sizeM8To be used with items702-1501702-1502702-1503	888-0014Clamp attachment cylinderThread sizeM8 internal M6 internalFinishChrome		
			888-0016 Clamp attachment plate Thread size M8	
	888-0015 Clamp attachment plate round Thread size M8 internal Finish White	000		
			3	

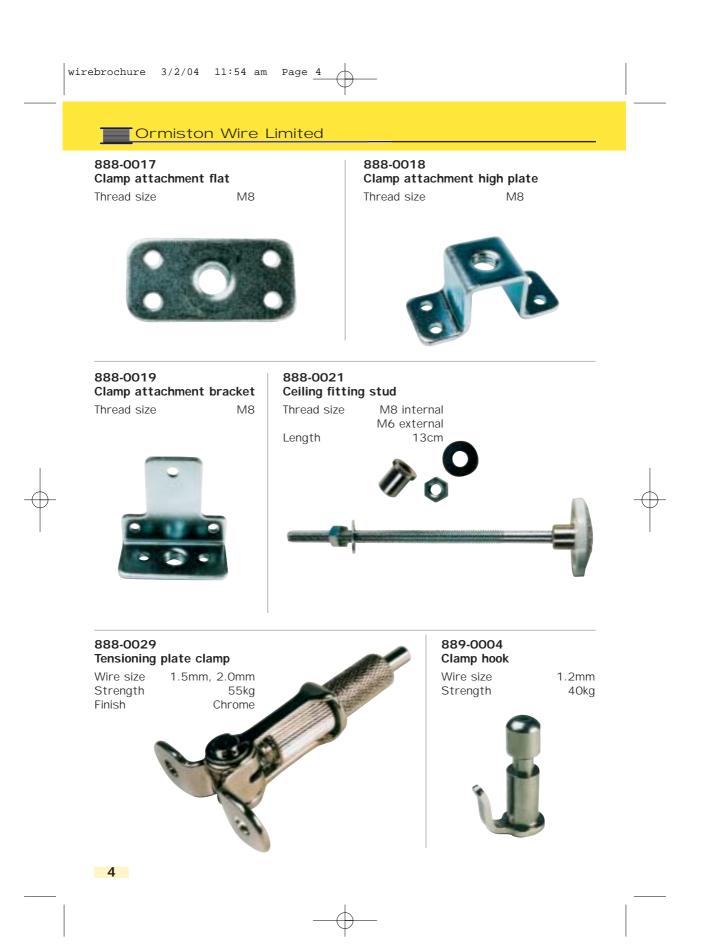







888-0027 Small hook clamp Wire size 1.5mm

Strength 55kg Finish Chrome



888-0028 Plate clamp Wire size 1.5mm, 2.0mm Strength 55kg Chrome Finish



888-0024 Barrel clamp

Wire size 1.5mm, 2.0mm Strength 60kg Thread size M8 Finish Chrome





1.5mm

1m

SS1 Shelf support Wire size

Strength 30kg Jaw width 7mm Jaw depth 11mm Finish Aluminium

702-1501 Stainless steel wire rope with stop end

Wire size 1.5mm Strength 155kg Wire length

702-1502 Stainless steel wire rope with stop end

Wire size 1.5mm Strength 155kg Wire length 2m

702-1503 Stainless steel wire rope with stop end

Wire size 1.5mm Strength 155kg Wire length 3m



Finish

Wire size Strength Jaw width Jaw depth


1.5mm 30kg 7mm 11mm Aluminium





Other lengths/sizes are made specially to order



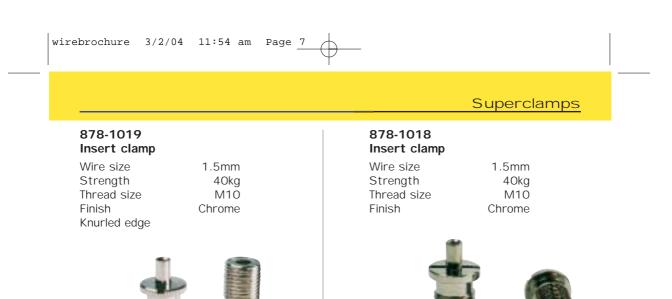



Hole 5mm Finish Chrome To go over ceiling clips 878-1002 and 878-1004



878-1001 Round cover 43x4.5mm

Hole 5mm Finish White To go over ceiling clips 878-1002 and 878-1004





878-1002 Ceiling clips

Thread sizeM5FinishWhiteSimply clips on to 25mmwide false ceiling grids

878-1003 Ceiling clips

Thread sizeM6FinishWhiteSimply clips on to 25mmwide false ceiling grids



878-1004 Clip

Thread size Hole size Finish M5 5mm White



878-1005 Ceiling attachment

Wire size1.5mmFinishChromeFor use with wire withtop end thread sizeM6



II

878-1007

8

Ceiling attachmentThread size internalM5Thread size externalM12FinishChrome

878-1008 Cap with slit

Thread sizeM12Wire1.5mmFinishChromeFits on 878-1007.For use with wire with stop end





Superclamps

878-1009 Cap with hole

Wire size1.5mThread sizeM12FinishChromeFits on 878-1007.For use with wire withstop endStop end



878-1010 Pipe Thread size Wire size Length

Length28mmDiameter9mmFinishChromeSpecial stop required



878-1012 Clamp thread M6

Wire size1.5mmStrength40kgLength35mmDiameter10mm with slotfor hanging wire off fitting.Grubscrew secured.FinishChromeSide exit for wire



878-1011 Clamp M8

M5

1.5mm

Wire size1.5mmStrength40kgLength44mmFinishChromeAdjustable 90° side exitfor wire



878-1013 Clamp M5

Wire size1.5mmStrength40kgLength28mmDiameter9mm with slotfor hanging wire off fitting.Grubscrew secured.FinishChromeSide exit for wire



878-1014 Clamp M5

Wire size1.5mmStrength40kgLength28mmDiameter9mm with hole forhanging wire off fitting.Grubscrew secured.FinishChromeSide exit for wire





878-1015	
Clamp long	knurl

Wire size Strength Thread Length Diameter Finish Side exit for wire 1.5mm 40kg M4 28mm 9mm Chrome



878-1017 Clamps taper with hole

Wire size	1.5mm
Strength	40kg
Length	25mm
Diameter	9mm
Finish	Chrome
Side exit for ha	nging wire
off fitting with	grubscrew
secured.	

878-1016 Clamp short	knurl
Wire size	

Strength Thread Length Diameter Finish 1.5mm 40kg M4 28mm 9mm Chrome





878-1020 Clamp M8 20% visible

Wire size Strength Finish 1mm 40kg Chrome

878-1021 Clamp M7

Wire size Strength Length Diameter Finish





wirebrochure 3/2/04 11:55 am Page 11

878-1022 Stop end with screw Wire size 1.5mm Finish Chrome 5mm x 7mm

878-1023 Clamp M4

Wire size Strength Hole in base Length Diameter Finish Side exit for wire

1.5mm 40kg M4 28mm 9mm Chrome



Superclamps

878-1024 Clamp M5

Wire size Strength Hole in base Length Diameter Finish Side exit for wire





878-1025 Convertor M5 to M8 Finish Chrome



878-1026 Ceiling hanger with slit M10

For use with insert thread M10

878-1027 Ceiling clip Thread size

Thread sizeM6FinishWhiteSimply clips on to 15mm widefalse ceiling grids







878-1028

ClampWire size1.5mmStrength40kgLength28mmDiameter9mmFinishChromeSide exit for wireHorizontal slot for hangingWire off fitting with grubscrewsecured.



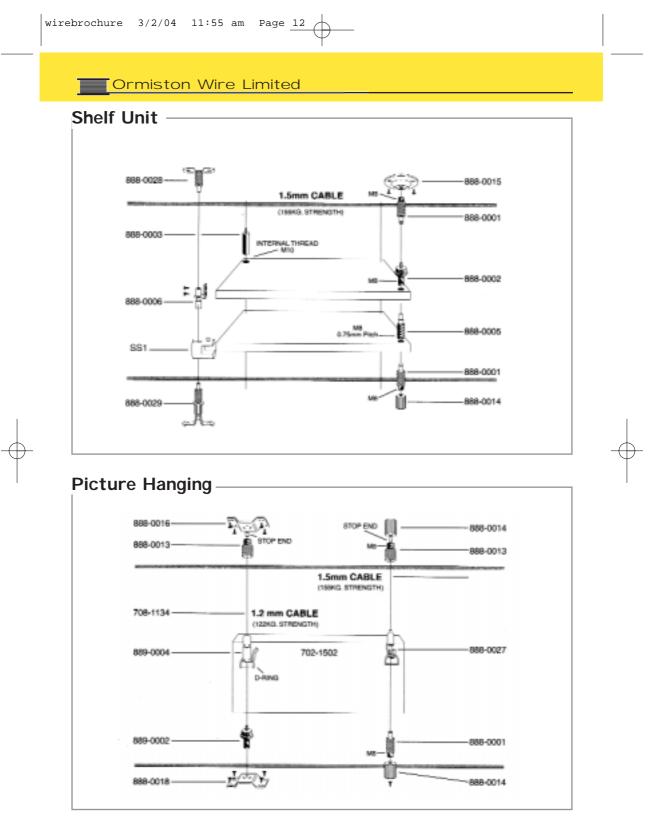

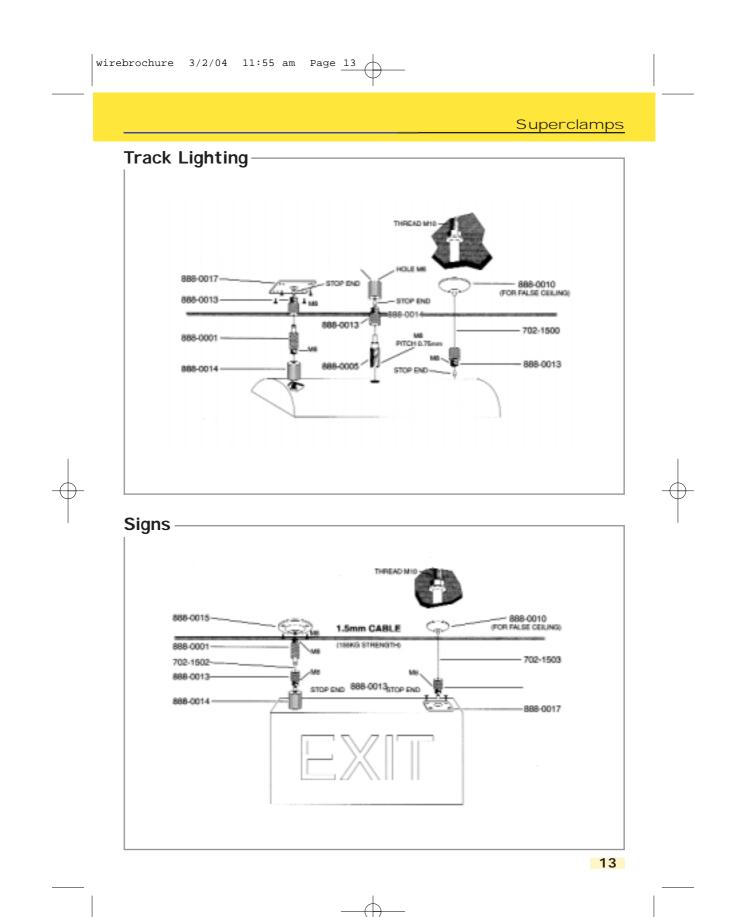

Microcables

Fine stainless steel cables, both plain and nylon, covered in a variety of sizes and constructions.

For use as control cables in electronic, medical, scientific, optical and photographic equipment, drawing boards, in fact any use where a low stretch, strong, small diameter flexible cable is required.



BARE	Dia. mm	Construction	Part number	Strength Kg	Strength lbs	To suit ferrule size
27.112	0.22	1 x 3	705-0045	4.5	10	1
	0.26	1 x 3	705-0068	6.8	15	1
	0.32	1 x 3	705-0091	9.0	20	1
	0.32	1 x 3	705-0136	13.6	30	1
	0.39	1 X 3	/05-0136	13.0	30	I
	0.45	1 x 7	705-0227	22.6	50	1
	0.51	1 x 7	705-0340	34.0	75	2
	0.60	1 x 7	705-0454	45.3	100	2
	0.75	1 x 7	705-0680	68.0	150	2
	0.87	1 x 7	705-0907	90.6	200	3
	1.05	1 x 7	705-1134	113.4	250	4
Extra Flexible						
	1.00	7 x 7	708-0794	79.3	175	3
	1.20	7 x 7	708-1134	113.4	250	4
	1.30	7 x 7	708-1361	136.0	300	5
NYLON	Dia, mm	Construction	Part number	Strength Kg	Strength lbs	To suit ferrule size
	0.36	1 x 3	704-0045	4.5	10	1
					10 15	1 1
	0.36	1 x 3	704-0045	4.5		1 1 1
	0.36 0.50	1 x 3 1 x 3	704-0045 704-0068	4.5 6.8	15	
	0.36 0.50 0.58 0.60	1 x 3 1 x 3 1 x 3 1 x 3 1 x 3	704-0045 704-0068 704-0091 704-0136	4.5 6.8 9.0 13.6	15 20 30	1 1
	0.36 0.50 0.58 0.60 0.70	1 x 3 1 x 3 1 x 3 1 x 3 1 x 3 1 x 7	704-0045 704-0068 704-0091 704-0136 704-0227	4.5 6.8 9.0 13.6 22.6	15 20 30 50	1 1 2
	0.36 0.50 0.58 0.60 0.70 0.75	1 x 3 1 x 3 1 x 3 1 x 3 1 x 3 1 x 7 1 x 7	704-0045 704-0068 704-0091 704-0136 704-0227 704-0340	4.5 6.8 9.0 13.6 22.6 34.0	15 20 30 50 75	1 1 2 2
	0.36 0.50 0.58 0.60 0.70 0.75 0.85	1 x 3 1 x 3 1 x 3 1 x 3 1 x 3 1 x 7 1 x 7 1 x 7 1 x 7	704-0045 704-0068 704-0091 704-0136 704-0227 704-0340 704-0454	4.5 6.8 9.0 13.6 22.6 34.0 45.3	15 20 30 50 75 100	1 1 2 2 3
	0.36 0.50 0.58 0.60 0.70 0.75 0.85 0.95	1 x 3 1 x 3 1 x 3 1 x 3 1 x 7 1 x 7 1 x 7 1 x 7 1 x 7	704-0045 704-0068 704-0091 704-0136 704-0227 704-0340	4.5 6.8 9.0 13.6 22.6 34.0	15 20 30 50 75 100 150	1 1 2 2
	0.36 0.50 0.58 0.60 0.70 0.75 0.85	1 x 3 1 x 3 1 x 3 1 x 3 1 x 3 1 x 7 1 x 7 1 x 7 1 x 7	704-0045 704-0068 704-0091 704-0136 704-0227 704-0340 704-0454	4.5 6.8 9.0 13.6 22.6 34.0 45.3	15 20 30 50 75 100	1 1 2 2 3
	0.36 0.50 0.58 0.60 0.70 0.75 0.85 0.95	1 x 3 1 x 3 1 x 3 1 x 3 1 x 7 1 x 7 1 x 7 1 x 7 1 x 7	704-0045 704-0068 704-0091 704-0136 704-0227 704-0340 704-0454 704-0680	4.5 6.8 9.0 13.6 22.6 34.0 45.3 68.0	15 20 30 50 75 100 150	1 1 2 2 3 3 3
COVERED	0.36 0.50 0.58 0.60 0.70 0.75 0.85 0.95 1.05 1.15	1 x 3 1 x 3 1 x 3 1 x 3 1 x 7 1 x 7 1 x 7 1 x 7 1 x 7 1 x 7 1 x 7	704-0045 704-0068 704-0091 704-0136 704-0227 704-0340 704-0454 704-0680 704-0907 704-1134	4.5 6.8 9.0 13.6 22.6 34.0 45.3 68.0 90.6 113.4	15 20 30 50 75 100 150 200 250	1 2 2 3 3 4 4
COVERED	0.36 0.50 0.58 0.60 0.70 0.75 0.85 0.95 1.05 1.15 1.20	1 x 3 1 x 3 1 x 3 1 x 3 1 x 3 1 x 7 1 x 7 1 x 7 1 x 7 1 x 7 1 x 7 1 x 7 7 x 7	704-0045 704-0068 704-0091 704-0136 704-0227 704-0340 704-0454 704-0680 704-0907 704-1134 706-0794	4.5 6.8 9.0 13.6 22.6 34.0 45.3 68.0 90.6 113.4 79.3	15 20 30 50 75 100 150 200 250 175	1 2 2 3 3 4 4 4
COVERED	0.36 0.50 0.58 0.60 0.75 0.85 0.95 1.05 1.15 1.20 1.30	1 x 3 1 x 3 1 x 3 1 x 3 1 x 7 1 x 7 1 x 7 1 x 7 1 x 7 1 x 7 1 x 7 7 x 7 7 x 7	704-0045 704-0068 704-0091 704-0136 704-0227 704-0340 704-0454 704-0680 704-0907 704-1134 706-0794 706-1134	4.5 6.8 9.0 13.6 22.6 34.0 45.3 68.0 90.6 113.4 79.3 113.4	15 20 30 75 100 150 200 250 175 250	1 2 2 3 3 4 4 4 5
COVERED	0.36 0.50 0.58 0.60 0.70 0.75 0.85 0.95 1.05 1.15 1.20	1 x 3 1 x 3 1 x 3 1 x 3 1 x 3 1 x 7 1 x 7 1 x 7 1 x 7 1 x 7 1 x 7 1 x 7 7 x 7	704-0045 704-0068 704-0091 704-0136 704-0227 704-0340 704-0454 704-0680 704-0907 704-1134 706-0794	4.5 6.8 9.0 13.6 22.6 34.0 45.3 68.0 90.6 113.4 79.3	15 20 30 50 75 100 150 200 250 175	1 2 2 3 3 4 4 4
COVERED	0.36 0.50 0.58 0.60 0.75 0.85 0.95 1.05 1.15 1.20 1.30	1 x 3 1 x 3 1 x 3 1 x 3 1 x 7 1 x 7 1 x 7 1 x 7 1 x 7 1 x 7 1 x 7 7 x 7 7 x 7	704-0045 704-0068 704-0091 704-0136 704-0227 704-0340 704-0454 704-0680 704-0907 704-1134 706-0794 706-1134	4.5 6.8 9.0 13.6 22.6 34.0 45.3 68.0 90.6 113.4 79.3 113.4	15 20 30 75 100 150 200 250 175 250	1 2 2 3 3 4 4 4 5
COVERED Extra Flexible BRASS FERRUL	0.36 0.50 0.58 0.60 0.75 0.85 0.95 1.05 1.15 1.20 1.30 1.60 ES Len	1 x 3 1 x 3 1 x 3 1 x 3 1 x 7 1 x 7 7 x 7 7 x 7 7 x 7 7 x 7 7 x 7	704-0045 704-0068 704-0091 704-0136 704-0227 704-0340 704-0454 704-0680 704-0907 704-0134 706-0794 706-1134 706-1361	4.5 6.8 9.0 13.6 22.6 34.0 45.3 68.0 90.6 113.4 79.3 113.4 136.0	15 20 30 50 75 100 150 200 250 175 250 300	1 1 2 2 3 3 4 4 4 5 6 0.D. I.D.
Extra Flexible BRASS FERRUL 1 903-00	0.36 0.50 0.58 0.60 0.70 0.75 0.85 0.95 1.05 1.15 1.20 1.30 1.60 ES Len 01 7r	1 x 3 1 x 3 1 x 3 1 x 3 1 x 7 1 x 7 1 x 7 1 x 7 1 x 7 1 x 7 1 x 7 1 x 7 7 x 7 7 x 7 7 x 7 7 x 7 7 x 7 7 x 7 7 x 7 7 x 7 1.72	704-0045 704-0068 704-0091 704-0136 704-0227 704-0340 704-0454 704-0680 704-0907 704-1134 706-0794 706-1134 706-1134 706-1361	4.5 6.8 9.0 13.6 22.6 34.0 45.3 68.0 90.6 113.4 79.3 113.4 136.0 4 903-0004	15 20 30 50 75 100 150 200 250 175 250 300 Lengths 14mm	1 1 2 2 3 3 4 4 4 5 6 O.D. I.D. 3.46 2.46
COVERED Extra Flexible BRASS FERRUL	0.36 0.50 0.58 0.60 0.70 0.75 0.85 0.95 1.05 1.15 1.20 1.30 1.60 ES Len 01 7r	1 x 3 1 x 3 1 x 3 1 x 3 1 x 7 1 x 7 7 x 7 7 x 7 7 x 7 7 x 7 7 x 7	704-0045 704-0068 704-0091 704-0136 704-0227 704-0340 704-0454 704-0680 704-0907 704-0134 706-0794 706-1134 706-1361	4.5 6.8 9.0 13.6 22.6 34.0 45.3 68.0 90.6 113.4 79.3 113.4 136.0	15 20 30 50 75 100 150 200 250 175 250 300	1 1 2 2 3 3 4 4 4 5 6 0.D. I.D.


Superclamps

Stainless steel ropes and micro cable fittings

We hold large stocks of stainless steel wire ropes, micro cables and fittings. If you need made up assemblies for suspension, lighting, signs, etc., please contact us.

We sell the wire and fittings separately for self-assembly if necessary.

- Wire Rope
- Plastic coated wire
- Micro cables
- Copper & aluminium ferrules
- Brass micro cable ferrules
- Stainless shackles
- Stainless thimbles
- Rigging screws
- Superclamp hanging system
- Wire rope grips and clamps

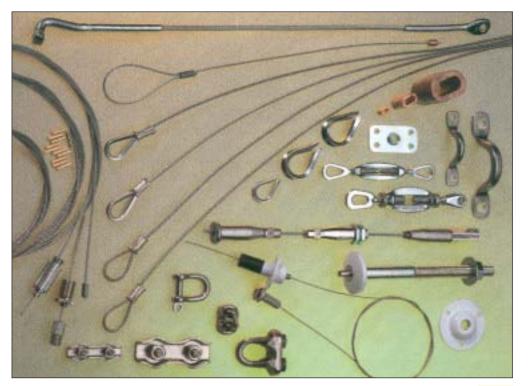

Superclamps

Micro cable hanging system.



